

LumEfficient



GC202 OPENLUX

HIGH BAY LIGHTING

GC201 REPLACEMENT FEATURING LIGHT EMITTING DIODE (LED)



Benefits

- One-piece open ring body provides maximum heat dissipation
- Uniquely designed prismatic lens provides ideal coverage and minimal glare
- 130 lumens per watt
- Optional 0-10V dimming
- Optional PIR sensor and microwave sensor
- 7-year warranty

Application Areas

- Workshop
- Warehouse
- Exhibition Hall
- Stadium
- Airport
- Railway
- Station
- Supermarket

Compliance

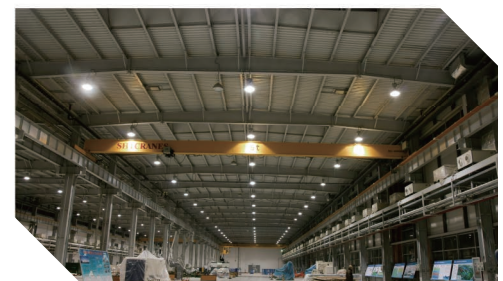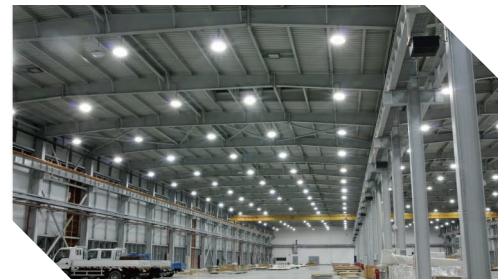

OUR SERVICES

Site Evaluation

Application Consulting

Installation Support

LumEfficient


INFO@LUMEFFICIENT.COM / WWW.LUMEFFICIENT.COM

SUBJECT TO CHANGE
v.2510


FEATURES

Input Voltage	AC120-277V
Surge Protection	100W/150W/200W: 4kV 200W: 10kV
Lighting Efficiency	>1.1
Color Rendering Index	Ra>80
Operating Temperature	-40°C to +45°C
Life Span	≥50,000H
Lamp Shell	White
Dimming	1-10V (optional)



OPTICS

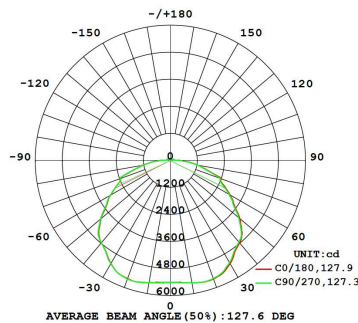

DIMENSIONS



100W/150W(AC120-277V)

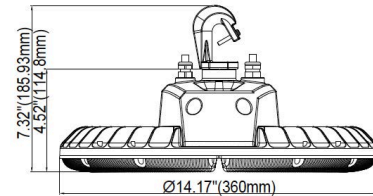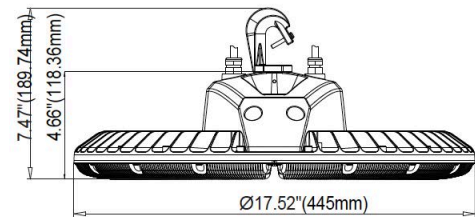200W (AC120-277V)
100W/150W(AC277-480V)240W (AC120-277V)
200W/240W(AC277-480V)

SPECIFICATIONS	GC202-100W	GC202-150W	GC202-200W	GC202-240W
Input Wattage	100W	150W	200W	240W
Initial Lumens	13,000	19,500	26,000	31,200
Lumens Per Watt	130	130	130	130
Lumen Maintenance	50,000	50,000	50,000	50,000
CRI	>80	>80	>80	>80
CCT (K)	4000K/5000K/ 5700K/6500K	4000K/5000K/ 5700K/6500K	4000K/5000K/ 5700K/6500K	4000K/5000K/ 5700K/6500K
Weight	12.83lbs	12.9lbs	13.56lbs	13.89lbs

ORDERING OPTIONS

Sample Order Code: GC202-150W-550-D1-PCD-HK-V1-W

Family	Wattage	Optics	Color Temp.	Control	Lens	Lens Type	Mounting	Voltage	Light Beam
GC202	100W	(5)	(40) 4000K	(D1) 1-10V Dimming (D2) PIR Sensor (D3) Microwave Sensor	(PC) PC	(D) Diffused	(HK) Hook	(V1) 120-277V	(W) 110°
	150W		(50) 5000K						
	200W		(57) 5700K						
	240W		(65) 6500K						